

# IK-HD1

## 3CCD HDTV CAMERA



### Features

- 1080i output
- 1920 x 1080 output pixels
- 3CCD (1/3") interlace
- C-mount
- Digital HD-SDI (SMPTE 292M);  
Analog RGB or Y/P<sub>0</sub>/P<sub>r</sub>
- RS 232C serial interface
- Auto & manual white balance
- Optional accessories:  
3, 6, 10 & 30 meter cables;  
4mm or 15 mm lens

### Applications

- Scientific imaging / diagnostics
- Specialty broadcast
- Homeland security
- Industrial video / inspection



### True High-Definition from the World's Smallest Camera Head.

Toshiba's HD 3CCD Color Camera System gives you the sharpest, clearest, true color imagery available – from the most compact HD camera on the market. Our unique prism block technology delivers impeccably sharp detail from a 1.6" camera head. Let Toshiba bring your project to HD life.

**TOSHIBA**  
Leading Innovation >>>  
Imaging Systems Division

# IK-HD1 3CCD HD CAMERA


## CAMERA HEAD:

### SPECIFICATIONS


Image Sensor	3CCD – 1/3 inch interlace
Output Resolution	1920 (H) x 1080 (V)
Sensitivity	F6.8 standard (2000 lux)
Minimum Illumination	13 lux (F2.2, Sensitivity + 18 dB)
S/N Ratio	≥ 54 dB
Lens Mount	C-mount
Ambient Temperature	0°C to 40°C (32°F to 104°F)
Ambient Humidity	Less than 90%
Dimensions	32.6 mm (W) x 38.6 mm (H) x 41 mm (D)
Weight	65 grams (2.3 oz)

Design and specifications are subject to change without notice.

## EXTERIOR DIMENSIONS

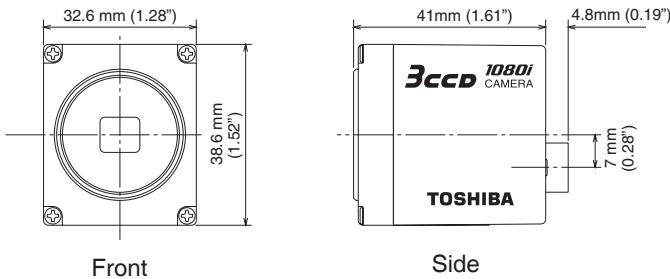

## CONNECTION

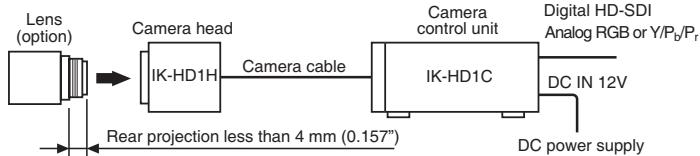

## SYSTEM COMPONENTS

For further details, contact your Toshiba ME/FA distributor.

### Camera System

Model	Description
IK-HD1H	Camera Head
IK-HD1C	Camera Control Unit

### Camera Cable

Model	Length
EXC-HD03	3 m
EXC-HD06	6 m
EXC-HD10	10 m
EXC-HD30	30 m

© 2007 Toshiba America Information Systems, Inc. All rights reserved. All products and names mentioned are the property of their respective owners. While Toshiba has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice.


This Class A digital apparatus complies with Canadian ICES-003.

## CONTROLLER:

### SPECIFICATIONS

Power Requirements	12V DC ± 10%
Power Consumption	10.3W
Output Signal	Digital HD-SDI (SMPTE 292M); Analog RGB or Y/P <sub>b</sub> /P <sub>r</sub>
Frame Rate	30 frames per second
Scene File (user memories)	5 files (A, B, C, D, E)
White Balance	ATW (automatic tracing balance), AWB (automatic white balance), MANUAL
Gain	AUTO (automatic gain control), MANUAL, OFF (0 dB)
Ambient Temperature	0°C to 40°C (32°F to 104°F)
Ambient Humidity	Less than 90%
Dimensions	110 mm (W) x 40 mm (H) x 186 mm (D)
Weight	730 grams (1.61 lbs)

## FRONT AND BACK PANELS

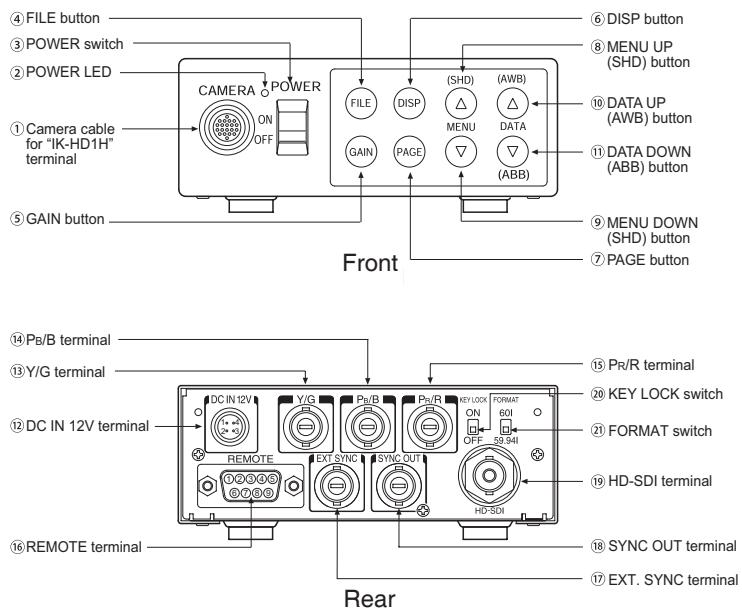

**TOSHIBA**  
Leading Innovation >>>

Toshiba America Information Systems, Inc.  
Imaging Systems Division  
9740 Irvine Boulevard, Irvine, California 92618  
949-583-3320 • www.cameras.toshiba.com